BEELED

ОПИСАНИЕ

ФОТО, НАИМЕНОВАНИЕ	BLD-FL100W	BLD-FL120W	BLD-FL140W	BLD-FL160W
Power Spec.				
Input Power Consumption(W)	100 W ±5%	120W ±5%	140W ±5%	160W ±5%
Input Voltage (No Dimmable) (V)	AC85V-AC265V			
Input Voltage ((Dimmable)) (V)				
Input Frequency(HZ)	50/60HZ			
Power Factor(PF)	>0.95	>0.95	>0.95	>0.95
Output Voltage(V)	30.1V	31.1V	31.3V	29.8V
Output Current(Ma)	2.830A	3.50A	4.030A	4.840A
Output Power(W)	85.2W	108.9W	126.2W	144.2W
LED Type	Epistar			
Beam Angle	120°			
Color Accuracy(CRI)	CRI>70			
Lifespan	>35,000 hours			
Base				
Product Weight	6.35KG	7.33KG	7.8KG	8.28KG
Environment Spec.				
Operational Temperature Range	-20~50 ℃			
Preservation Temperature Range	-40~60 ℃			
Operational Humidity Range	95% Rh or below(@-20°C~50°C)			
Installation Area	Outdoor:IP65(Roadway, Pathway, Sidewalk,etc)			

ДИАГРАММЫ ОСВЕЩЕННОСТИ

	Warmwhite(ww) 3000k-3500k Luminous Flux:7500±5% Luminous Efficiency:75±5%	Natural White(4000K-4500K) Luminous Flux:8100±5% Luminous Efficiency:81±5%	Cool White(5000K-6500K) Luminous Flux:8700±5% Luminous Efficiency:87±5%
BLD-FL100W **(WW/NW/CW)**	LUX-Distance Curve	LUX-Distance Curve	LUX-Distance Curve
		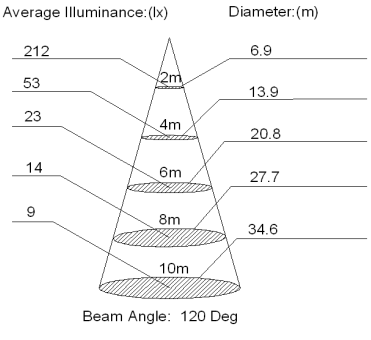	

BLD-FL120W **(WW/NW/CW)**	Warmwhite(ww) 3000k-3500k Luminous Flux:8870±5% Luminous Efficiency:75±5%	Natural White(4000K-4500K) Luminous Flux:9500±5% Luminous Efficiency:80±5%	Cool White(5000K-6500K) Luminous Flux:10300±5% Luminous Efficiency:85±5%
	LUX-Distance Curve	LUX-Distance Curve	LUX-Distance Curve
	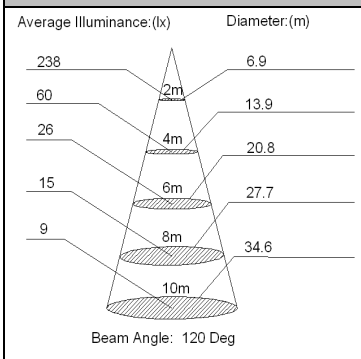 Beam Angle: 120 Deg	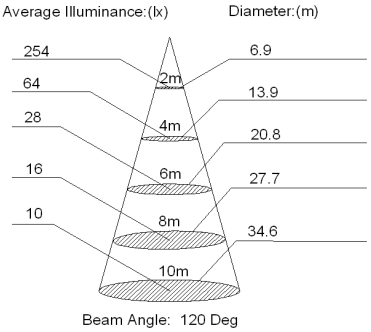 Beam Angle: 120 Deg	 Beam Angle: 120 Deg
BLD-FL140W **(WW/NW/CW)**	Warmwhite(ww) 3000k-3500k Luminous Flux:10350±5% Luminous Efficiency:70±5%	Natural White(4000K-4500K) Luminous Flux:11190±5% Luminous Efficiency:80±5%	Cool White(5000K-6500K) Luminous Flux:12030±5% Luminous Efficiency:85±5%
	LUX-Distance Curve	LUX-Distance Curve	LUX-Distance Curve
	 Beam Angle: 120 Deg	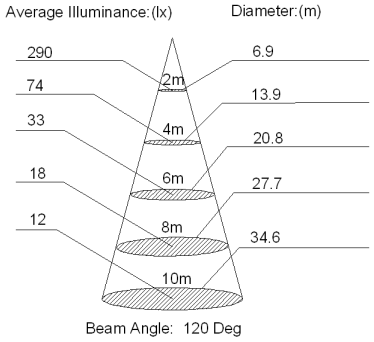 Beam Angle: 120 Deg	 Beam Angle: 120 Deg
BLD-FL160W **(WW/NW/CW)**	Warmwhite(ww) 3000k-3500k Luminous Flux:12000±5% Luminous Efficiency:75±5%	Natural White(4000K-4500K) Luminous Flux:13120±5% Luminous Efficiency:82±5%	Cool White(5000K-6500K) Luminous Flux:14080±5% Luminous Efficiency:88±5%
	LUX-Distance Curve	LUX-Distance Curve	LUX-Distance Curve
	 Beam Angle: 120 Deg	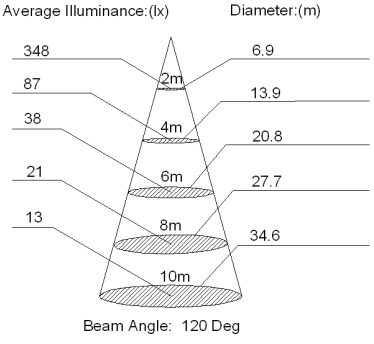 Beam Angle: 120 Deg	 Beam Angle: 120 Deg

ГАБАРИТНЫЕ РАЗМЕРЫ

BLD-FL100W

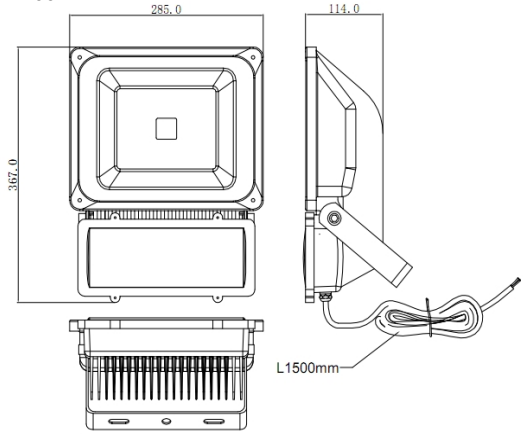

BLD-FL120W

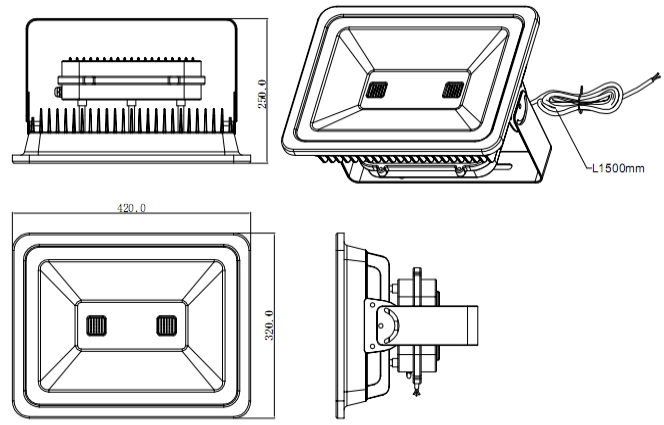

BLD-FL140W

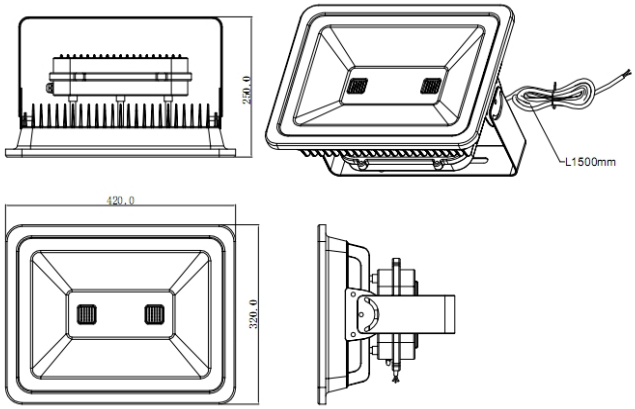

BLD-FL160W

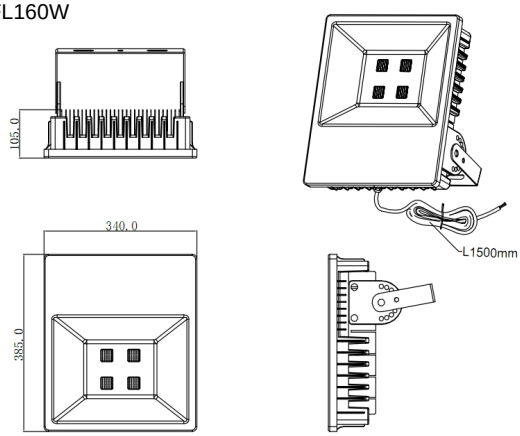

РЕКОМЕНДАЦИИ ПО МОНТАЖУ

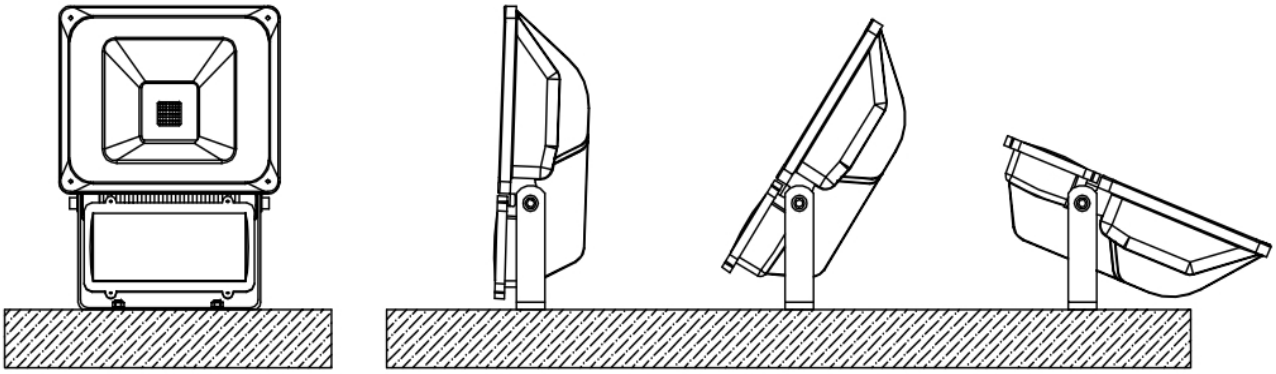

Angle of rotation 110°
Installation Diagram

BLD-FL100W

BLD-FL120W/BLD-FL140W

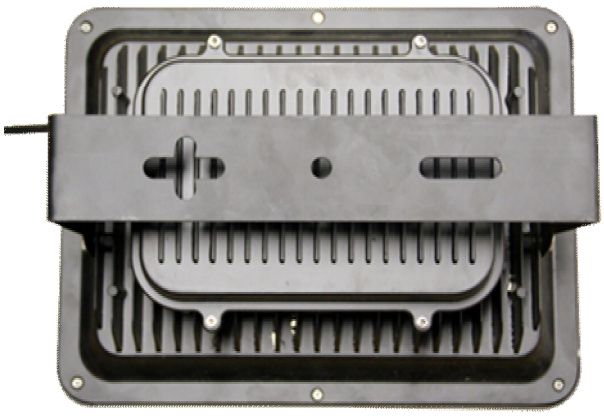

BLD-FL160W