



BEELED -

MODEL: 0805W2C-KHB-A



Features

- Compatible with automatic placement equipment
- Compatible with infrared and vapor phase reflow solder process
- Mono-color type
- Pb-free

Descriptions

- The 0805 SMD LED is much smaller than lead frame type components thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained
- Besides, lightweight makes them ideal for miniature applications.etc

Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA

Applications

- Automotive: Backlighting in dashboard and switch
- Telecommunication: Indicator and backlighting in telephone and fax
- Flat backlight for LCD, switch and symbol
- General use


BEELED -

MODEL: 0805W2C-KHB-A

Device Selection Guide

LED Part No.	Chip		Lens Color
	Material	Emitted Color	
0805W2C-KHB-A	InGaN	White	Water clear

Package Dimensions

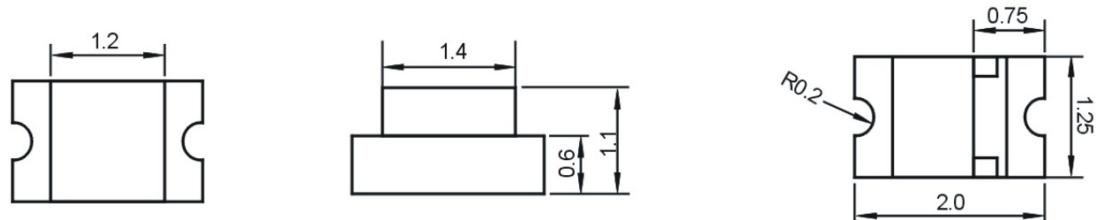

UNIT:mm

Notes:

- Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Protruded resin under flange is 1.5mm Max LED.
- Bare copper alloy is exposed at tie-bar portion after cutting.



BEELED -

MODEL: 0805W2C-KHB-A

Absolute Maximum Rating ($T_a=25^\circ C$)

Parameter	Symbol	Absolute Maximum Rating		Unit
Forward Pulse Current	I_{FPM}	70		mA
Forward Current	I_{FM}	30		mA
Reverse Voltage	V_R	5		V
Power Dissipation	P_D	140		mW
Operating Temperature	T_{opr}	-40~+80		°C
Storage Temperature	T_{stg}	-40~+100		°C
Soldering Heat (5s)	T_{sol}	260		°C

Electro-Optical Characteristics ($T_a=25^\circ C$)






Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_V	200	---	300	mcd	IF=20mA(Note 1)
Viewing Angle	$2\theta_{1/2}$	---	120	---	Deg	(Note 2)
Peak Emission Wavelength	λ_p	---	---	---	nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$	25	30	35	nm	IF=20mA
Forward Voltage	V_F	2.9	---	3.5	V	IF=20mA
Reverse Current	I_R	---	---	10	μA	VR=5V

Note:


1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

MODEL: 0805W2C-KHB-A

Typical Electro-Optical Characteristics Curves

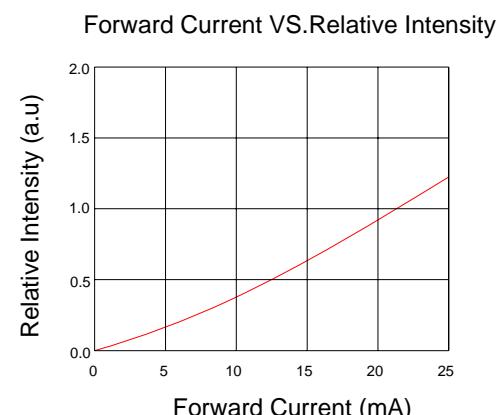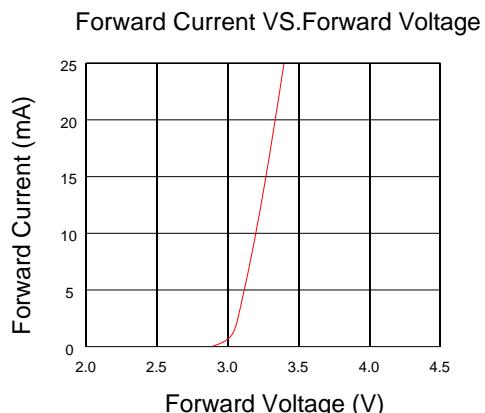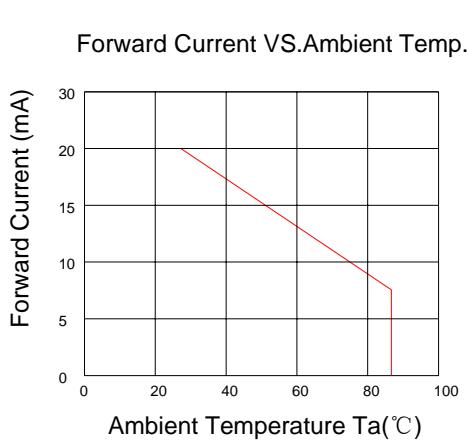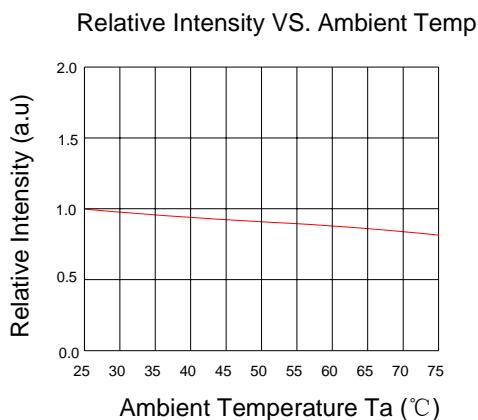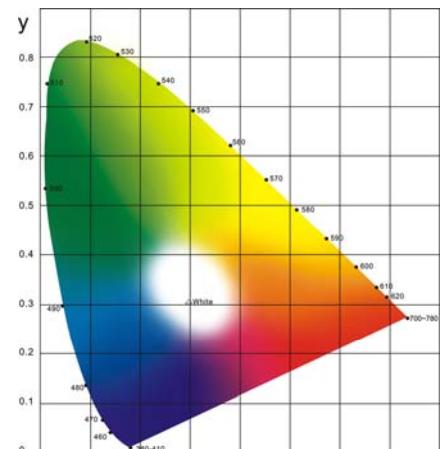

Radiation Characteristics

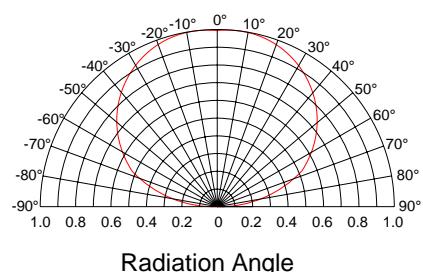



BEELED -

MODEL: 0805W2C-KHB-A

1. , BEELED
2. ,
BEELED ,
3. ,
BEELED , BEELED.